

4000TOC Sensor



THORNTON

Leading Pure Water Analytics

4000TOC Sensor

- Fast, continuous measurements
- No reagents or chemicals needed
- No moving parts
- Meets USP <643>, <645>, Ch P, EP 2.2.44, and JP requirements
- Compact wall-mount sensor design/NEMA 4X enclosure for skid mounting

Continuous On-Line Measurement Total Organic Carbon Monitoring

METTLER TOLEDO

Features

- On-line continuous measurement for fastest response
- Advanced UV lamp design extends stability and wavelength emission over lamp life
- Sample Conditioning Coil (included) can prevent CO₂ permeation into the water sample and will stabilize inlet flow, pressure and temperature irregularities
- Local LED Sensor status indication

Benefits

- Continuous flow design provides rapid detection of system changes
- No gases or reagents to handle, store or replace and no moving parts minimize routine maintenance and service intervals
- Plug and measure sensor design reduces installation and setup time
- Real-time continuous monitoring for precise data trending and better process control
- Wide dynamic operating range meets the needs of pure and ultrapure water applications
- Meets USP (643), (645), EP 2.2.44, Ch.P and JP requirements for the Pharmaceutical Industry
- Sensor platform allows easy integration into water purification make-up and distribution system designs
- Compact NEMA 4X rated enclosure for demanding industrial environments
- Meets ASTM D5173 standard test method for on-line TOC monitoring
- Conductivity/temperature sensor and measurements traceable to NIST and ASTM D1125 and D5391

Measurement technology - UV Oxidation / Differential Conductivity

The 4000TOC Sensor uses proven ultraviolet oxidation with differential conductivity as the method to effectively determine TOC concentrations. High performance Thornton conductivity sensors provide continuous conductivity measurement before and after sample oxidation. This is accomplished using a continuous flow-through spiral quartz tube design that allows the sample to flow continuously through the sensor. This design maximizes exposure to the 185 nanometer UV light, while minimizing measurement response time. This simple and effective design requires no reagents or chemicals and includes no moving mechanical components.

Applications

Pure and Ultrapure water production requires monitoring of organic contamination throughout the treatment process. The 4000TOC Sensor provides continuous, fast, and reliable monitoring of TOC levels from post RO waters to point-of-use. With continuous on-line measurements, the 4000TOC Sensor ensures TOC excursions will not be missed.

Pharmaceutical-grade waters must meet strict water quality requirements. This highly regulated industry mandates the monitoring of Total Organic Carbon levels for PW (Purified Water), WFI (Water for Injection) and HPW (Highly Purified Water). The instruments used in this application must also undergo periodic testing to verify the ability to accurately measure TOC. Testing requirements are described in the USP Chapter (643), EP 2.2.44, Ch.P and JP. The 4000TOC Sensor provides the performance needed to meet these requirements, and USP (645) for conductivity, while offering added benefits such as continuous on-line measurement in a low-maintenance, industrial package. The 4000TOC Sensor can operate at elevated temperatures to 100°C, where steam and periodic hot water sanitizing is required.

Recycle and reclaim applications take advantage of the fast analysis time. The 4000TOC Sensor provides continuous monitoring, not lengthy batch cycles. This provides the system operator with time to respond to TOC excursions caused by process variability.

Power generation makeup water treatment – from reverse osmosis to demineralizers, the 4000TOC Sensor provides fast reliable monitoring of TOC contamination in the water system. Organic contamination can be detected before it enters the steam cycle where its breakdown to organic acids can accelerate corrosion.

Product Support

The following 4000TOC products and services are also available:

- Factory Instrument Calibration
- Customized Hands-On-Training
- Service and Calibration Contracts
- System Suitability Testing
- On-Site Calibration

Please contact your local Mettler-Toledo Thornton office for more information.

4000TOC Performance Specifications

| TOC Sensor | |
|---|---|
| Measurement Range | 0.05 - 1000 ppbC ($\mu\text{gC/L}$) |
| Accuracy | ± 0.1 ppb C for TOC < 2.0 ppb (for water quality > 15 M Ω -cm [$.067 \mu\text{S/cm}$]) ± 0.2 ppb C for TOC > 2.0 ppb and < 10.0 ppb (for water quality > 15 M Ω -cm) $\pm 5\%$ of measurement for TOC > 10.0 ppb (for water quality 0.5 to 18.2 M Ω -cm) |
| Repeatability | ± 0.05 ppb C < 5 ppb, $\pm 1.0\%$ > 5 ppb |
| Resolution | 0.001 ppbC ($\mu\text{gC/L}$) |
| Analysis Time | Continuous |
| Initial response time | < 60 seconds |
| Limit of Detection | 0.025 ppbC |
| Conductivity Sensor | |
| Conductivity Accuracy | $\pm 1\%$, 0.02-20 $\mu\text{S/cm}$ $\pm 3\%$, 20-100 $\mu\text{S/cm}$; 0.1 Constant Sensor* |
| Cell Constant Accuracy | $\pm 2\%$ |
| Temperature Sensor | PT1000 RTD, Class A |
| Temperature Accuracy | $\pm 0.25^\circ\text{C}$ |
| Sample Water Requirements | |
| Temperature | 0 to 100 $^\circ\text{C}$ ** |
| Particle Size | <100 micron |
| Minimum Water Quality | ≥ 0.5 M Ω -cm ($\leq 2 \mu\text{S/cm}$), pH < 7.5 *** |
| Flow Rate | ≥ 20 mL/min |
| Pressure | 4 to 200 psig (0.3 bar to 13.6 bar) at sample inlet connection **** |
| General Specifications | |
| Case Dimensions | 11" [280mm] W x 7.4" [188mm] H x 5.25" [133mm] D |
| Weight | 5.0 lb. (2.3 kg) |
| Enclosure material | Polycarbonate plastic, flame retardant, UV and chemical resistant UL # E75645, Vol.1, Set 2, CSA #LR 49336 |
| Enclosure rating | NEMA 4X, IP65 Industrial environment |
| Ambient Temperature/ Humidity rating | 5 to 50 $^\circ\text{C}$ / 5 to 80% Humidity, non-condensing |
| Power requirements | 100 - 130VAC or 200 - 240VAC, 50/60 Hz, 25W Maximum |
| Local Indicators | Four LED lights for Fault, Error, Sensor Status and UV Lamp ON |
| Ratings/Approvals | CE Compliant, UL and cUL (CSA Standards) listed, NEMA 4X, IP65 Conductivity and temperature sensors traceable to NIST, ASTM D1125 and D5391. Meets ASTM D5173 Standard Test Method for On-Line Monitoring of Carbon Compounds in Water by UV Light Oxidation |
| Sample Connections | |
| Inlet connection | 0.125" [3mm] O.D. (6' [2m] FDA compliant PTFE tubing supplied) |
| Outlet connection | 0.125" [6mm] O.D. Barb connection (5' [1.5m] flexible tubing provided) |
| Inlet Filter | 316SS, inline 60 micron |
| Wetted parts | 316SS/Quartz/PEEK/Titanium/PTFE/Polyurethane (outlet tubing only)/EPDM |
| Wall Mount | Standard, mounting tabs provided |
| Pipe Mount | Optional, with pipe-mount bracket accessory (for nominal pipe sizes 1" [2.4 cm] to 4" [10 cm]) |
| Maximum Sensor Distance | 300ft [91m] |

* Readout in equivalent S/m ranges selectable at M300 TOC


** Temperature above 70 $^\circ\text{C}$ requires Sample Conditioning Coil (included)

*** For power plant cycle chemistry samples, pH may be adjusted by measurement after cation exchange.

**** Process pressure above 85 psig (5.9 bar) requires optional High Pressure Regulator p/n 58 091 552.


Specifications subject to change without notice.

Dimensional Data

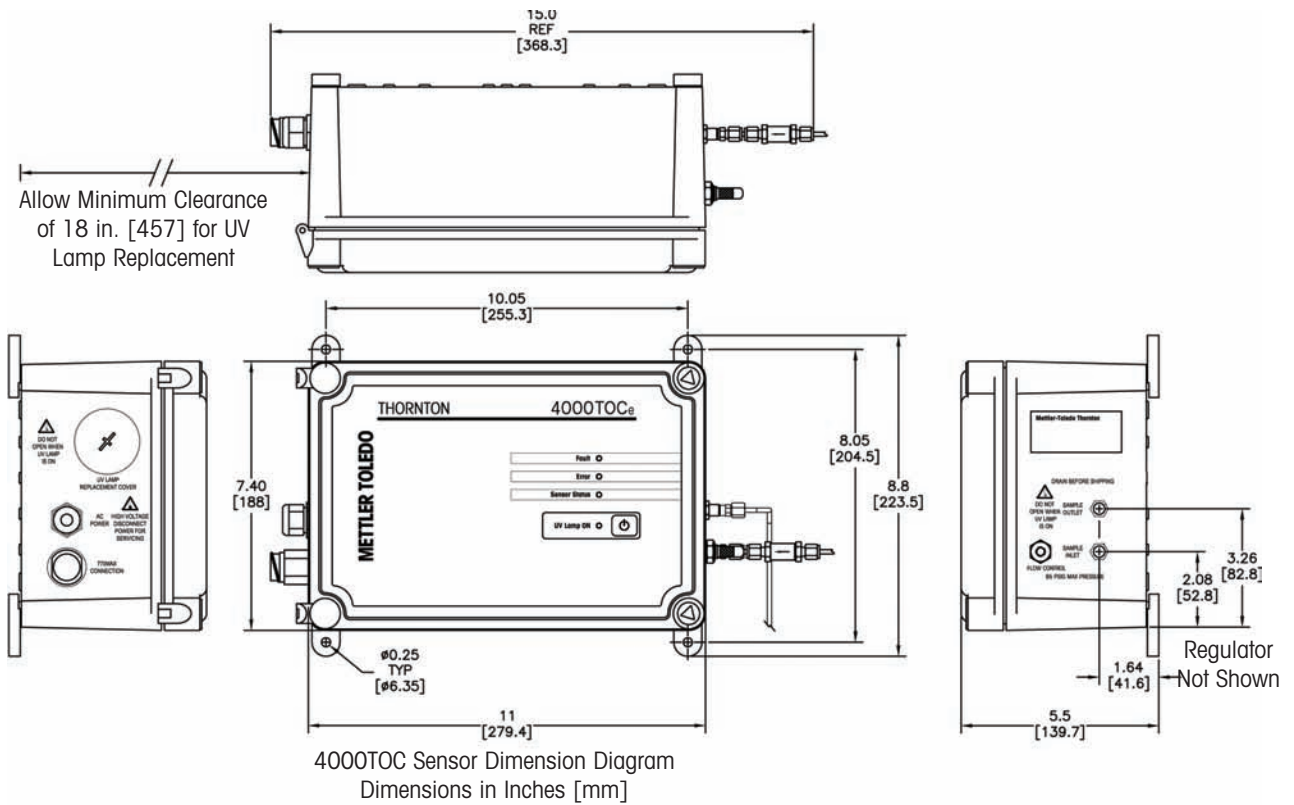

4000TOC Sensor Installation

The Thornton 4000TOC Sensor minimizes installation and setup time. Two tubing connections are required, one for the sample inlet, and one for the oxidized sample outlet. An isolation valve is recommended at the sample point for shutoff, as needed (valve not supplied by Thornton).

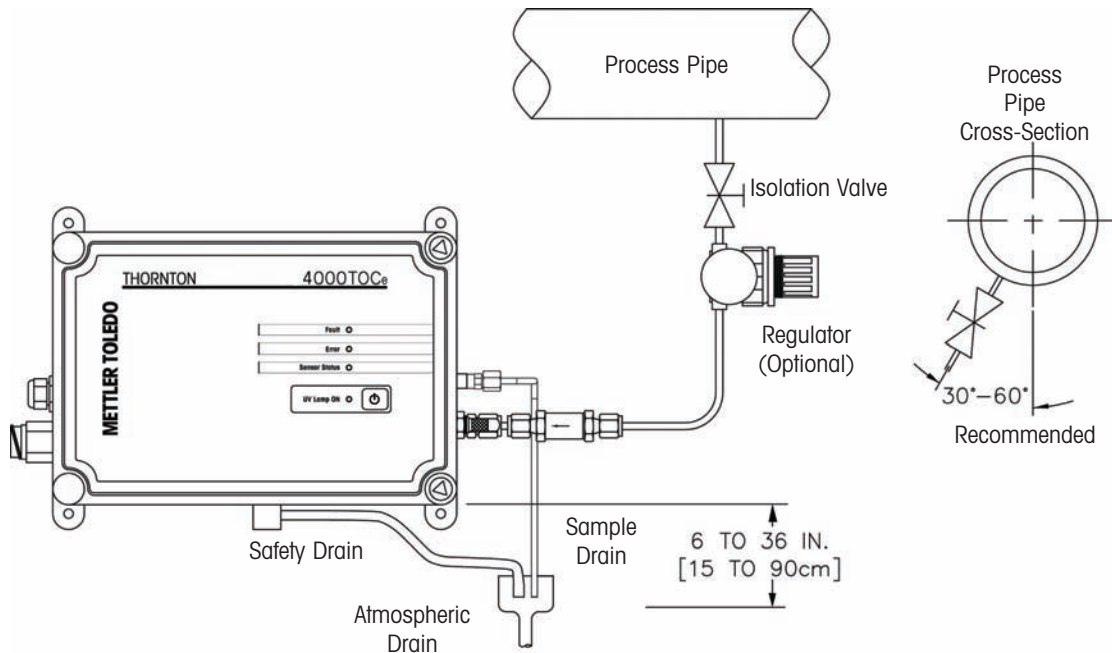

Dimensions in inches [mm]

M300 TOC Transmitter

- Back-lit four-line display
- Two large display lines for easy long distance viewing
- Multi-Lingual menus







Specifications


| Functional | |
|---|--|
| TDS Ranges (CaCO ₃ and NaCl) | Cover equivalent conductivity ranges |
| Conductivity Resolution | Four significant digits, auto-ranged |
| Temperature Resolution | 0.1 ° |
| Update rate | Display and outputs, once per second |
| Temperature Compensation for Conductivity/Resistivity | Selectable as: Std (standard high purity Thornton/Light) none |
| Sensor maximum distance | 91 m (300 ft) |
| Outputs | |
| Setpoints/Alarms | 4 - high, low, outside, between, USP or EP |
| Analog outputs | Two powered 0/4-20 mA outputs, 22 mA alarm, 500 ohms maximum load; not for use with externally powered circuits |
| Analog output accuracy | ± 0.05 mA |
| Analog output scaling | Linear, bi-linear, logarithmic (1,2,3 or 4 decades), auto-ranging |
| Relays | All contacts are potential free, with adjustable hysteresis and time delay |
| 2 SPDT | 250 VAC/30 VDC, 3 A, resistive |
| 2 SPST reed | 300 VDC, 0.5 A, 10 W |
| Digital communications | USB, type B connector, for service interface |
| Discrete input | Accepts dry contact closure for remote PID control auto/manual selection |
| Enclosure/Power | |
| Operator interface | 4 line back-lit LCD; 5-tactile keys |
| 1/4 DIN Model Dimensions (H x W x D) | 4.01 x 4.01 x 5.51 in (102 x 102 x 140 mm) |
| Max. Depth, - panel mounted | 4.96 in (126 mm), excluding plug-in connectors |
| 1/2 DIN Model Dimensions (H x W x D) | 5.90 x 5.90 x 4.57 in (150 x 150 x 116 mm) |
| Max. Depth, - panel mounted | 3.46 in (88 mm) |
| Material | Polycarbonate |
| Weight, 1/4 DIN Models | 1.5 lb (0.7 kg) |
| Weight, 1/2 DIN Models | 2 lb (1 kg) |
| UL Electrical Environment | Installation (overvoltage) Category II |
| Ratings/Approvals | UL listed, CE compliant; NEMA 4X, IP 65 - 1/2 DIN wall mount and 1/4 DIN panel seal |
| EMC Emissions | According to EN55011 Class A |
| Power | Universal 100-240 VAC, 50-60 Hz or 20-30 VDC; 5 W (on power loss, all settings are retained in non-volatile memory without batteries) |
| Environmental | |
| Storage temperature | -40 to 70 °C (-40 to 158 °F) |
| Ambient temperature operating range | -10 to 50 °C (14 to 122 °F) |
| Relative humidity | 0 to 95% |

M300 TOC Transmitter

Dimensions for 1/4 DIN panel-mount models

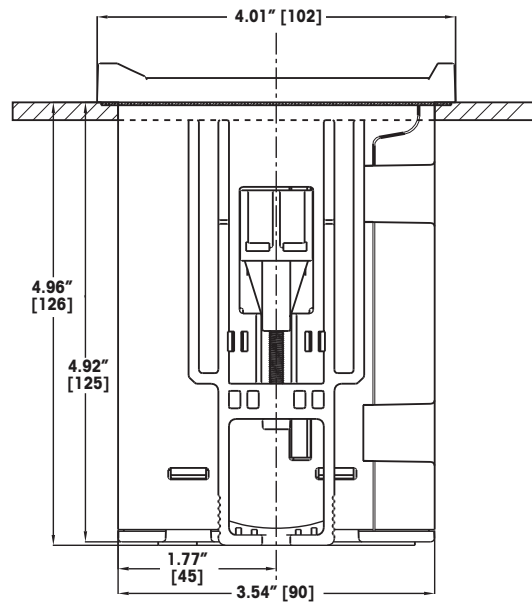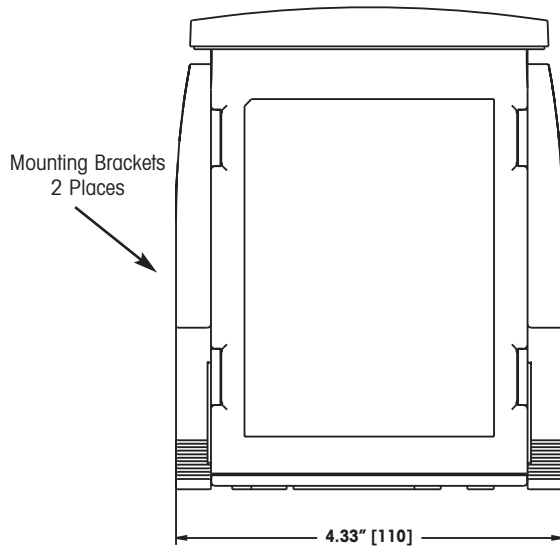
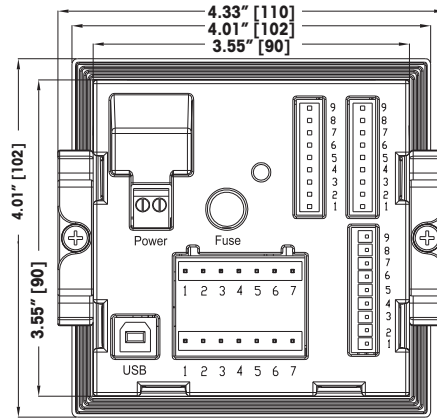
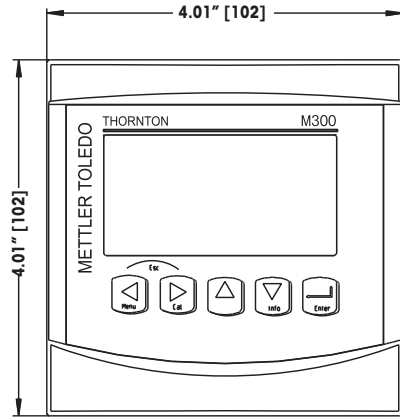


Dimensions for 1/4 DIN panel cutout

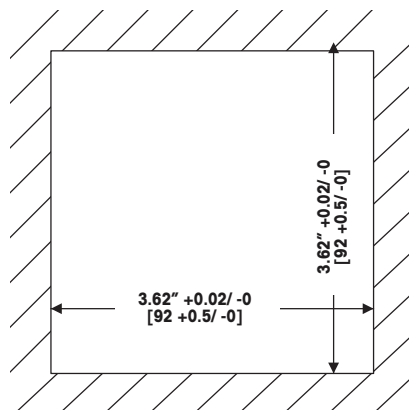


Dimensions in inches [mm]


Dimensions for 1/2 DIN wall/panel-mount models

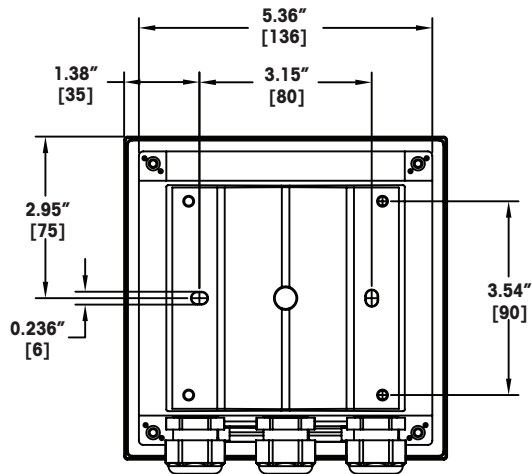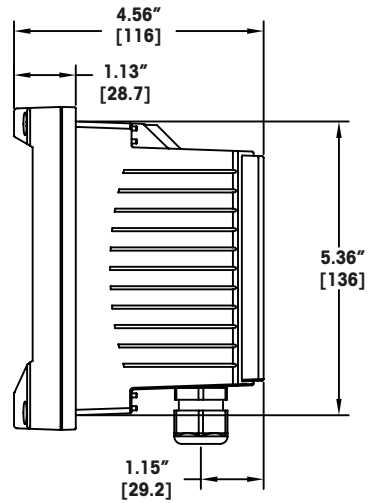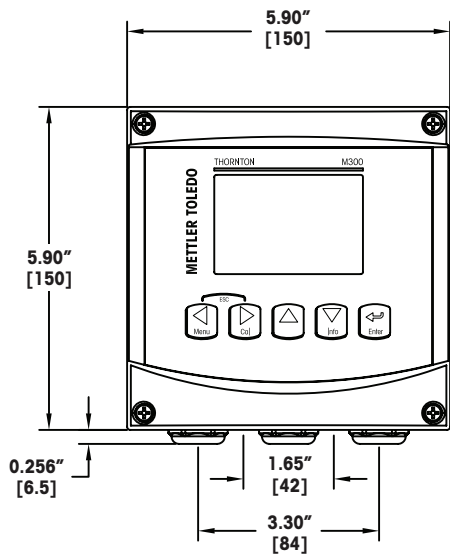

Panel Cutout Dimensions

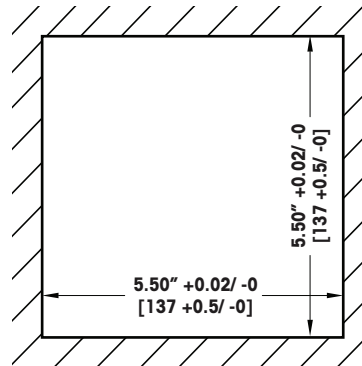

Dimensions for 1/2 DIN pipe mount kit

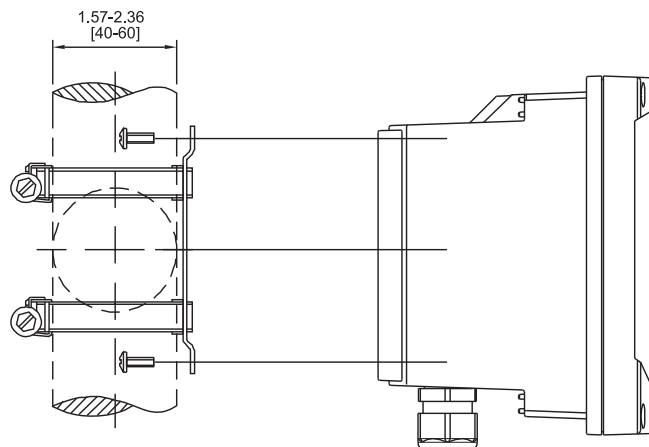

Dimensions in inches [mm]

4000TOC Sensor Ordering information

| Description | Part No. |
|--|------------|
| 4000TOC Sensor, 110 VAC, 50/60 Hz | 58 036 021 |
| 4000TOC Sensor, 220 VAC, 50/60 Hz | 58 036 022 |
| System Suitability and Calibration | |
| Calibration & System Suitability Test Kit (SST & Calibration Standards Sold Separately) | 58 091 559 |
| Validation Support Package | 58 091 558 |
| Combined System Suitability Standards and Calibration Solutions Set (Use with SST/Cal Kit 58 091 559. Includes solutions from 58 091 526 & 58 091 529) | 58 091 537 |
| System Suitability Standards (for use with SST/Cal Kit 58 091 559, includes 500 ppb as Sucrose, 500 ppb as p-Benzoquinone and reagent water for one test) | 58 091 526 |
| Calibration Standards (for use with SST/Cal Kit 58 091 559, includes 500 ppb as Sucrose, 250 ppb as Sucrose verification, and reagent water) | 58 091 529 |
| Accessories | |
| Kit, Tool, TOC Sensor | 58 091 520 |
| Kit, Pipe mounting, for 1-1/2" nominal pipe size | 58 091 521 |
| Kit, Pipe mounting, for 2" nominal pipe size | 58 091 522 |
| Kit, Pipe mounting, for 3" nominal pipe size | 58 091 523 |
| Kit, Pipe mounting, for 4" nominal pipe size | 58 091 524 |
| High Pressure Inlet Regulator, 1/4" NPT-female | 58 091 552 |
| Outlet Drain Tube | 58 091 553 |
| Replacement Parts | |
| Replacement Inlet Filter Element, 60 micron (Pkg.2) (Recommended w/ lamp change) | 58 091 551 |
| Replacement UV lamp (recommended every 4500 hours of operation) | 58 079 513 |
| Kit, Fuse, Sensor PCB (for use on both 110 and 220 VAC models) | 58 091 519 |

M300 TOC Transmitter Ordering Information

| Description | Part No. |
|--|------------|
| M300 TOC ¼ DIN Enclosure (Panel mounting kit included) | 58 006 302 |
| M300 TOC ½ DIN Enclosure | 58 006 312 |
| Accessories | |
| Panel Mount Kit for 1/2 DIN models | 52 500 213 |
| Pipe Mount Kit for 1/2 DIN models | 52 500 212 |
| Patch Cords | |
| 1 ft (0.3 m) | 58 080 270 |
| 5 ft (1.5 m) | 58 080 271 |
| 10 ft (3.0 m) | 58 080 272 |
| 15 ft (4.5 m) | 58 080 273 |
| 25 ft (7.6 m) | 58 080 274 |
| 50 ft (15.2 m) | 58 080 275 |
| 100 ft (30.5 m) | 58 080 276 |
| 150 ft (45.7 m) | 58 080 277 |
| 200 ft (61.0 m) | 58 080 278 |
| 300 ft (91.4 m) | 58 080 279 |

www.mt.com/thornton

Visit for more information

Mettler-Toledo Thornton, Inc.

36 Middlesex Turnpike
Bedford, MA 01730 USA
Tel. +1-781-301-8600
Fax +1-781-301-8701
Toll Free +1-800-510-PURE (US and Canada only)
thornton.info@mt.com

Subject to technical changes
© Mettler-Toledo Thornton, Inc.
ML0142 Rev.A 10/10



Quality certificate.

Development, production and testing to ISO 9001.



A certified ServiceXXL provider.



CE Compliant



UL listed
Meets Canadian Standards